

MAMBA J

Mamba J

- General purpose all-metal hose
- Commonly used in high temperature vacuum or general purpose applications where permeation is undesirable.

CoreDux base hose range									
Nominal Hose Size [in. (mm)]	Hose material	Braid material	Hose Inside dia. [in. (mm)]	Hose outside dia. [in. (mm)]	Minimum centre line bend radius		Working pressure at 70°F (20°C) [psig (bar)]	Minimum Burst Pressure at 70°F (20°C) [psig (bar)]	Temp. Range [°F (°C)]
					Static [in. (mm)]	Dynami c [in. (mm)]			
1/4" DN006	316L SS	304 SS	0,24 (6,2)	0,45 (11,4)	0,91 (23)	4,33 (110)	2030 (140)	8120 (560)	-325 to 800 (-200 to 426)
3/8" DN010	316L SS	304 SS	0,41 (10,4)	0,70 (17,8)	1,20 (30,5)	5,91 (150)	1470 (101)	5880 (404)	-325 to 800 (-200 to 426)
1/2" DN012	316L SS	304 SS	0,49 (12,4)	0,80 (20,2)	1,50 (38,1)	6,50 (165)	1160 (80)	4640 (320)	-325 to 800 (-200 to 426)
3/4" DN020	316L SS	304 SS	0,78 (19,9)	1,18 (29,9)	1,50 (38)	6,66 (169)	860 (59,2)	3500 (241)	-325 to 800 (-200 to 426)
1" DN025	316L SS	304 SS	0,98 (24,9)	1,43 (36,4)	1,77 (45)	7,68 (195)	680 (46,8)	2680 (184)	-325 to 800 (-200 to 426)

Compliance

- EN ISO 9001
- EN ISO 10380 / ASME 31.3

Cleanliness

- Standard deliveries: White room
- Vacuum, Ultra high purity: possible upon request


Packaging

- Each hose is bagged individually and boxed. Longer hoses are coiled, bagged and boxed.


Product tests

- Helium leak test (1x10⁻⁵ std cm3/s)
- Additional options: he leak test 1x10⁻⁹ std cm3/s


MAMBA J End connections



Tube adapter

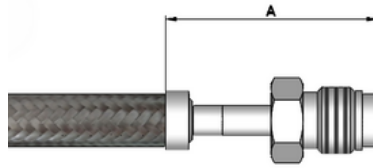

MFSM (male*)

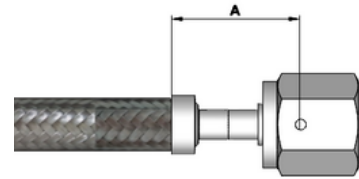


MFSF (female*)

**Male and female adapter not available in 3/8"*

Working pressure - temperature ratings may be limited by the end connections.

Nominal Hose Size in.(mm)	Tube Adapter	
	Stub thickness [in.(mm)]	Stub Outside Dia. [in.(mm)]
1/4" DN006	0,035 (19)	0,25 (24,7)
3/8" DN010	0,035 (19)	0,375 (29,8)
1/2" DN012	0,035 (19)	0,5 (29,9)
3/4" DN020	0,035 (19)	0,75 (35)
1" DN025	0,035 (19)	1 (38)

Ordering instructions

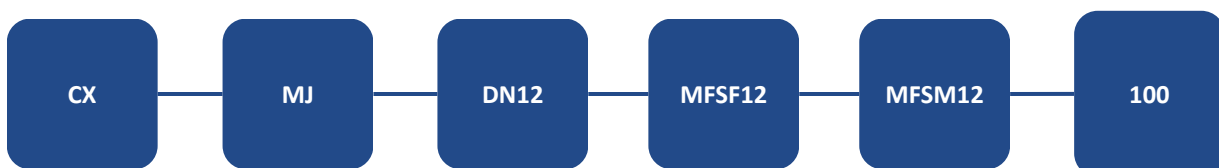

Product type:

- Mamba J

Diameter:

- DN06 = ¼"
- DN10 = ⅜"
- DN12 = ½"
- DN20 = ¾"
- DN25 = 1"

Fittings:

- MFSF = Metal Face Seal Femail
- MFSM = Metal Face Seal Male
- TB = Tube Adapter

Length:

Our standard sizes are measured in inches. If you request a product in CM, please specifically note CM in your request.

Options:

- Labelling requirements
- Ultra High purity
- Helium leak test (1x10⁻⁹ cm3 std/s)
- Hydrostatic test
- Nitrogen pressure test